

Thermal imaging helps to detect water ingress in airplanes

Composite materials for modern aircraft need to be extremely sturdy and lightweight. These materials are vital to aircraft performance and airworthiness. A structure used in many parts of modern airplanes is the honeycomb. This structure has an appearance much as the honeycomb found in a beehive and is extremely light and strong. As long as they are intact, honeycomb structures offer exceptional weight to strength ratios but it is important that the structure is bonded to the outer skins, of e.g. airplane wings, in a reliable way. Often this is done with composite materials such as carbon fiber. Honeycomb structures in airplanes can, among other places, be found at the access doors, engine cowlings, rudders, elevators, stabilizers, nose landing gear and flaps.

Even with the best bonding process, the bond between the honeycomb material and the sheet material is not perfect. This presents a potentially dangerous problem: water ingress in the honeycomb structure.

Avoiding dangerous flight conditions

Significant pressure changes can force air into and out of honeycomb cells that are not perfectly sealed. Because airplanes experience such large pressure changes, while climbing and descending, they are particularly susceptible to this.

When an airplane takes off and goes up to high altitude, where the pressure is lower, air is forced out of some honeycomb cells that are not bonded perfectly. The air at high altitude is also cooler so some


water condenses out and remains in the honeycomb cells. As the airplane lands, warmer and moistured air reenters the cell. When this process repeats itself over and over again, the cell fills with water. Each time the airplane goes up to high altitude, the water in the cells freezes, and expands, and the bond is further weakened. In this manner disbanding can occur in neighboring cells and the problem will become even bigger. Water can also enter the honeycomb structure when the bonding is damaged by e.g. hail.



The FLIR P-Series thermal imaging cameras will help you trace anomalies invisible to the human eye.




Mr. Ralf Grispen while inspecting an airplane with his FLIR thermal imaging camera.

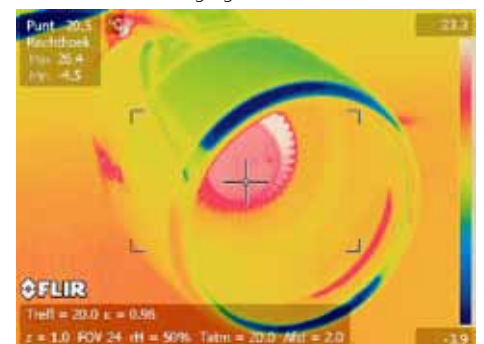

Thermal image of an engine; It takes expertise to "read" the thermal pictures of an airplane as different materials have different emission, resulting in different colors in the thermal image.



APPLICATION STORY

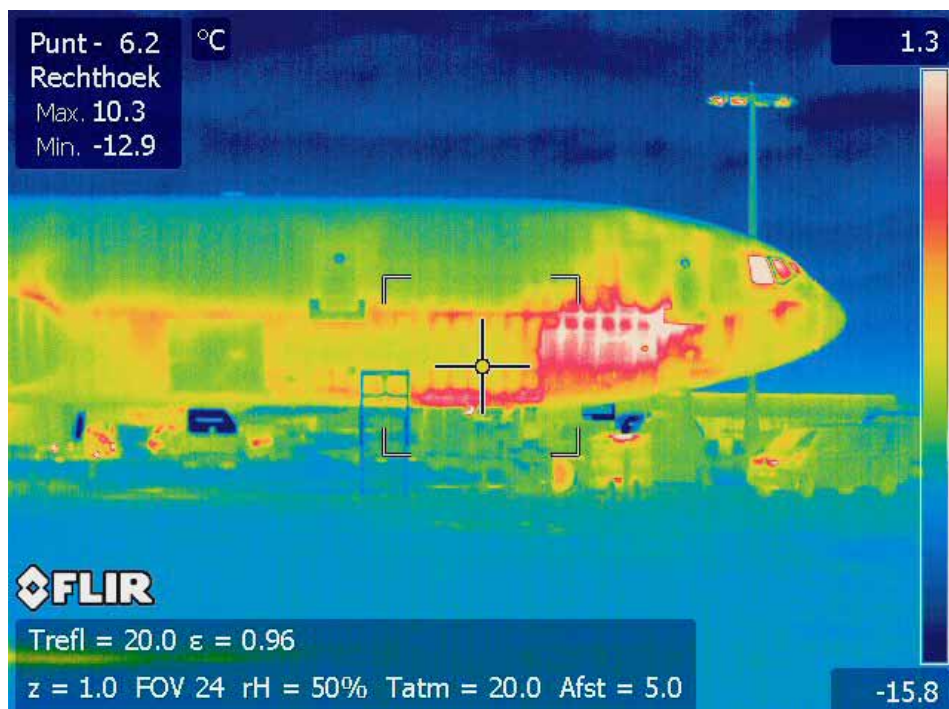

By making a thermal image from a distance you can get a good overview on any anomalies in the entire airplane.

Water ingress in an airplane part can create a dangerous situation. Although the honeycomb is very strong and lightweight, it loses these characteristics when it is damaged by, in this case, ice. Furthermore, the ice will also separate the bonding from the honeycomb. Through vibration the total bonding structure can be weakened or even partly destroyed. This means that the airplane will lose its stability. The weight of the ice also influences the aircraft balance. Besides these potential dangerous consequences, the fuel consumption is rising as well. The total weight of the aircraft is increasing, so it will need more fuel to fly. It is therefore of the utmost importance that water ingress is detected in an early stage so that necessary action can be taken.

Water ingress in aircraft honeycomb sandwich structures is an ongoing issue that has attracted significant attention from aircraft operators, maintenance depots and the research community. Water ingress can lead to skin-to-core bonding degradation, affecting structural integrity. More significantly, water ingress may contribute to structural failure of composite honeycomb sandwich components.

That is why it is very important to discover water ingress at an early stage, so the removal of the water from the honeycomb can be done on time and bonding degradation is being avoided. One of the most severe

problems that maintenance engineers encounter during hot bonded repair is inadequate water removal, which can lead to high void content in the bondline, degradation of adhesive bonds, and even blow-off of the skins due to sudden build-up of vapour pressure in the honeycomb cells.

Water removal has been studied for centuries. Various techniques have been developed to achieve efficient water removal, including the application of heat, vacuum, ultrasound, centrifugal forces and electrical pulses. Among the investigated test scenarios, only combined heating and vacuum drying was found to be effective at removing all the water from the aircraft surfaces. Using this combined approach the water removal rate was initially high with 80% water removal in less than two days, followed by a drastically reduced drying rate. Heating is the most commonly used method for water removal. Heating can be conducted by various means such as convection, conduction, radiation and microwave. The advantage of vapour is that it can travel through any existing moisture paths easily. Based on water phase diagrams, water can evaporate at a temperature well below 100 °C at less atmospheric pressure.


Thermography

To be sure there is no water/moisture left or to check if the water removal has succeeded, thermal imaging camera's help to discover


water ingress. Late discovery of water is resulting in a lot of extra costs and/or delays which always need to be reduced to the minimum. The most important goals of a maintenance department are to have an early indication of possible problem areas at the start of every c-check. Besides this the inspection has the purpose to analyze, interpret and report hidden water on all composite parts of aircraft selected to have the focus on. The best moment for this inspection method is directly after landing, otherwise the thermal imaging cameras may not localize the spots, which is also the experience of one of our frequent customers; Martinair Holland. Of course this is possible in a hangar but that's very labour-intensive because we have to simulate a difference in temperature with heating blankets or flash / puls thermography.

Water and composite materials have different thermal properties. When out of thermal balance, after a heating or cooling process, a temperature difference is observed between water and composite. A thermal imaging camera enables the temperature distribution on the inspection surface to be observed.


In flash thermography, a brief pulse of light is used to heat the surface of a sample, while a thermal imaging camera records changes in the surface temperature.

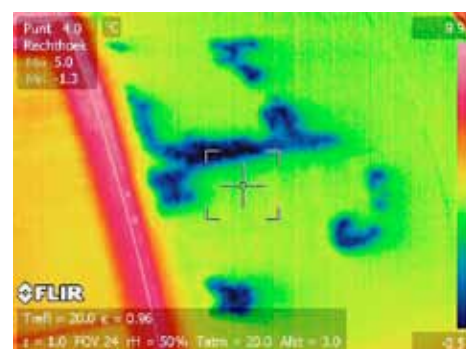

The thermal image shows lots of damages on top of an inlet cowl.

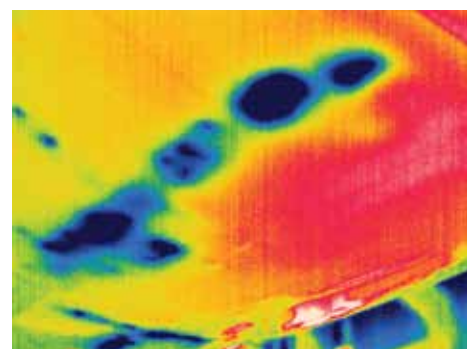

Also a lot of damage on the bottom of this inlet cowl can be seen on this thermal image.

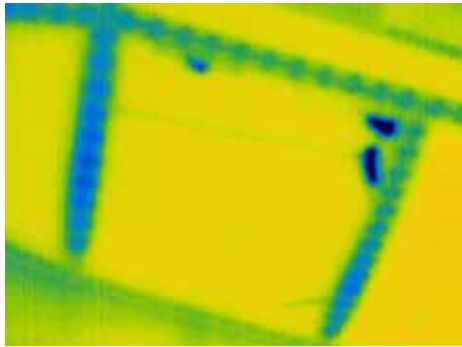


Some small spots on a fairing are shown, indicating water ingress.

As the sample cools, the surface temperature is affected by internal flaws such as disbonds, voids or inclusions, which obstruct the flow of heat into the sample.

Thermal imaging cameras are being used for a wide variety of applications. An enthusiastic user of FLIR Systems thermal cameras is the Dutch 'Thermografisch & Adviesbureau Uden BV'. It is an experienced agency which is specialized in independent inspections and supplies subsequent recommendations to industry and construction.

"A major part of our work is doing electrical and mechanical inspections", says Mr. Ralf Grispén, commercial manager at Thermografisch & Adviesbureau Uden BV. "We also do a lot of building inspections with FLIR thermal cameras. Thermal cameras

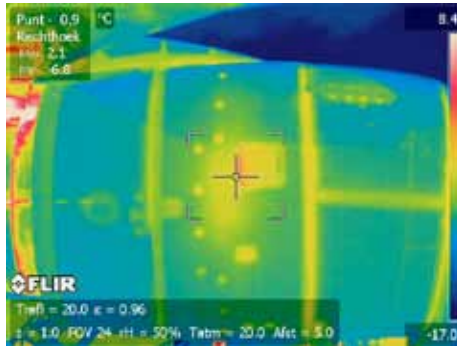


An overview (inboard) of an engine, taken from a Boeing 767-300ER.

are especially proving their worth during fast inspections of airplanes. Although thermal imaging cameras are being used for periodic maintenance inspections of engines and other parts of an airplane as well, the cameras are being used at a large scale to look for water ingress in airplane wings and in the airplane body." At the moment we have a wide experience within a number of 75 aircrafts for several MRO's and airlines. "When you are being contacted by these kinds of clients, it tells a lot about the delivered quality. I dare to say that we are pioneers if we are talking about this sort of industry segment."


Detecting "cold-spots" with the thermal imaging camera

"Thermal imaging is a great technology to inspect water ingress", explains Mr. Paul

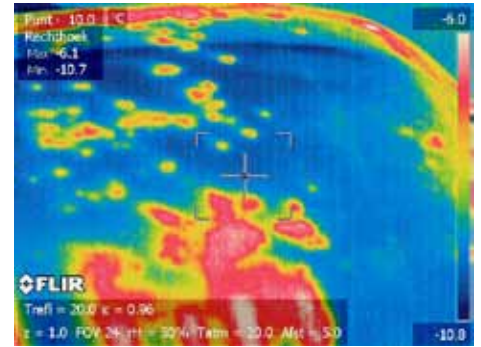


A lot of damage on top of an engine, located directly after the airplane has landed.

Kennedy, Composite/Painting Supervisor/Inspector at Air Atlanta Aero Engineering. "At high altitude, at temperatures of -40°C or lower, the water in the honeycomb cells freezes. The airplane descends relatively fast so when it lands, the water is still frozen. The thermal imaging camera can clearly distinguish these cold-spots. Thermal imaging also gives us the opportunity to check large surfaces within very short timeframe. This is necessary because when the ice melted we cannot see the damaged parts anymore. Depending on the temperature on the ground, in general we can say that we have only one hour to inspect a plane. With thermal imaging this is perfectly possible. If the camera finds any parts with severe water ingress, the skin is opened up, and the water removal program will run." Mr. Kennedy says that removing the

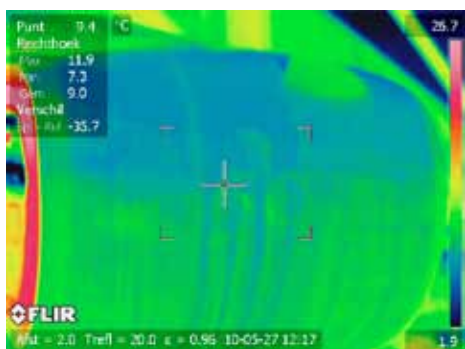

An overview (inboard) of an engine, taken from a Boeing 767-200SF.

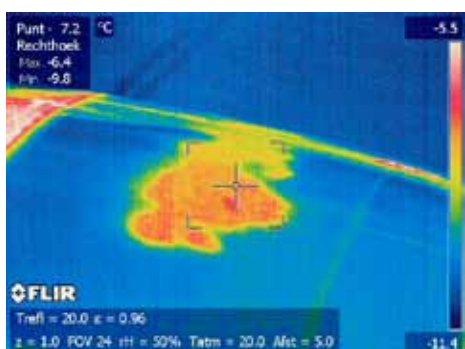

A lot of damage on the top of a thrust reverser, located directly after the airplane has landed.



FLIR P660

A FLIR P-Series camera is the perfect instrument for users who know the advantages that thermal imaging has to offer, and who rely on a thermal imaging camera at work. Whether you are an infrared consultant or a PDM professional in the utilities - or manufacturing industry, the FLIR P-Series thermal imaging cameras will help you trace anomalies invisible to the human eye.



Specifications P660

- <30 mK sensitivity, accuracy +/- 1%
- Wide choice of optics
- 8x digital zoom
- Extended measurement functions
- Advanced Laser Pointer
- Set temperature alarms
- USB and Firewire connection
- Radiometric and non-radiometric video recording
- Sequence recording in camera
- Built-in GPS
- Contrast Optimizer

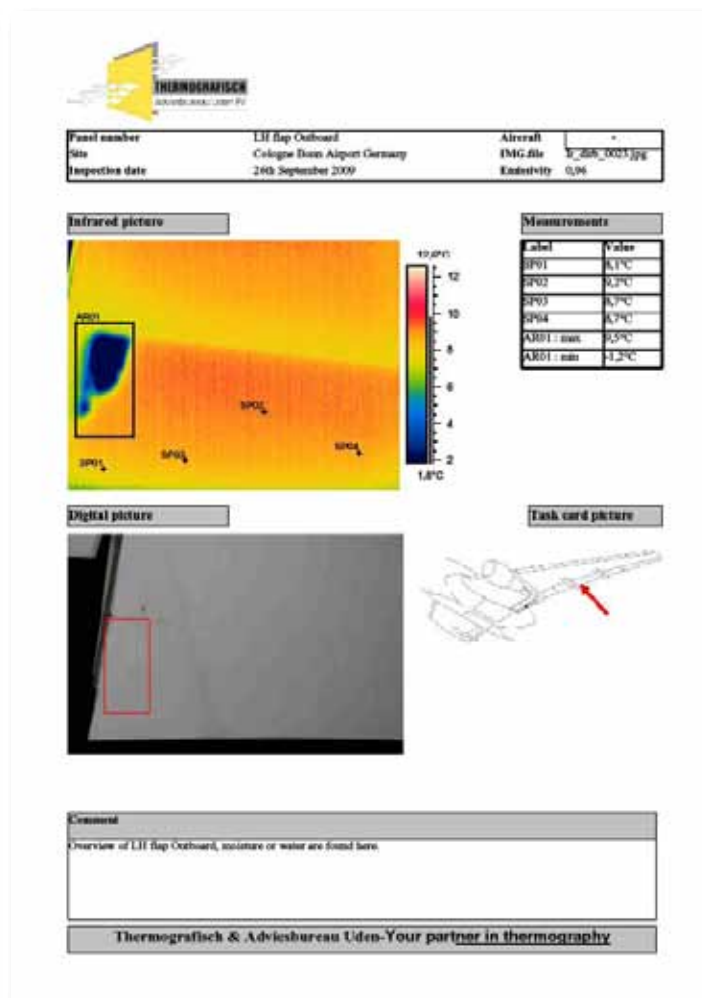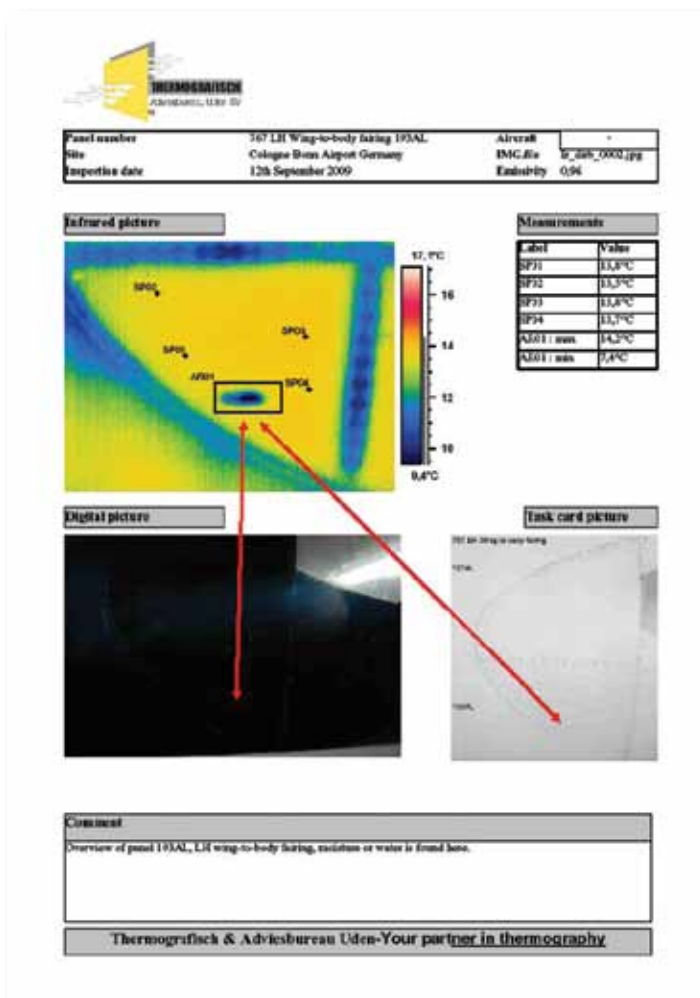

Examples of the final report made by Thermografisch Advies Bureau Uden.

water in an early stage is very important. "If we should leave the water for a substantial period of time, it can lead to complete failure of the particular parts. And an airplane is much heavier with a lot of water, this will give unnecessary costs. Removing water not only saves money, more important it will save lives."

There are of course other ways to detect water ingress in airplane parts but compared to thermal imaging they present great disadvantages. You can work with liquid crystal sheets that are put, under vacuum, on the parts to be inspected. This is however a very slow method and it works only for small parts. X-ray has the disadvantage that it is expensive in time, equipment and manpower. Furthermore, it can expose maintenance personnel to hazardous ionizing radiation.

"The FLIR P660 thermal imaging camera is a great tool to perform these types of inspections", says Mr. Grispén. The FLIR P660

produces crisp thermal images of 640x480 pixels on which the smallest of details can be seen. The camera allows seeing temperature differences as small as 0.03°C. Not only does the FLIR P660 has a super size 5.6" foldable high-quality LCD screen, it also has a viewfinder which can be extremely easy to do inspections in summertime and the sun is shining on the LCD display."

"Once the inspection is done, we produce a report in Reporter. This easy-to-use software allows us to deliver a perfectly documented and detailed report of our findings to the crew that will do the actual repairs. The FLIR P660's possibility to take a visual image as a reference against the thermal image, allows us to show these people the exact location on the airplane that needs to be fixed."

Although not too many people realize that these inspections are being done, the FLIR P660 ensures that passengers have a safe flight.

Source:

Investigation of an accelerated moisture removal approach of a composite aircraft control surface (Chun Li, Rick, Ueno, Vivier Lefebvre, National Research Council Canada, The university of Ottawa, Department of National Defence Canada).

Credits:

Mr. Paul Kennedy, Air Atlanta Aero Engineering (www.airatlanta.ie)
 Mr. Ralf Grispén, Thermografisch & Adviesbureau Uden BV (www.thermografie.nl)
 Martinair Holland

Pictures:

Thermografisch & Adviesbureau Uden BV

For more information about thermal imaging cameras or about this application, please contact:

FLIR Commercial Systems B.V.
 Charles Petitweg 21
 4847 NW Breda - Netherlands
 Phone : +31 (0) 765 79 41 94
 Fax : +31 (0) 765 79 41 99
 e-mail : flir@flir.com
 www.flir.com